

BRE Global Limited & LPCB

Bucknalls Lane, Garston, Watford, Hertfordshire, United Kingdom WD25 9XX
Telephone: +44(0)1923 664100 Fax: +44(0)1923 664603 E-mail: enquiries@breglobal.co.uk Web: www.breglobal.co.uk

EC-CERTIFICATE OF CONFORMITY

0832 - CPD - 0433

In compliance with the Directive 89/106/EEC of the Council of European Communities of 21 December 1988 on the approximation of laws, regulations and administrative provisions of the Member States relating to the construction products (Construction Products Directive - CPD), amended by the Directive 93/68/EEC of the Council of European Communities of 22 July 1993, it has been stated that the construction product

MI-WSD-x-I Intelligent wall mounted sounder with short circuit isolator for use in fire detection and alarm systems

(For conditions of use for the product see the attached appendix)

placed on the market by

Morley IAS Fire Systems By Honeywell
Charles Avenue, Burgess Hill, West Sussex, RH15 9UF

and produced in the factory

KAC Alarm Company Ltd
KAC House, Thornhill Road, North Moons Moat, Redditch, Worcestershire, B98 9ND

is submitted by the manufacturer to a factory production control and to the further testing of samples taken at the factory in accordance with a prescribed test plan. The initial type-testing for the relevant characteristics of the product, the initial inspection and continuous surveillance of the factory and factory production control has been performed under the control of the approved body BRE Global Limited.

This certificate attests that all provisions concerning the attestation of conformity (Level 1) and the performances described in Annex ZA of the standard(s)

EN 54 - 17: 2005 - Fire detection and fire alarm systems - Short circuit isolators
EN 54 - 3: 2001 + A1: 2002 + A2: 2006 - Fire detection and fire alarm systems - Fire alarm devices - Sounders

were applied and that the product fulfils all the prescribed requirements.

This certificate was first issued on 18/4/2006 and remains valid as long as the product continues to be manufactured and the conditions laid down in the harmonised technical specification referenced or the manufacturing conditions in the factory or the FPC itself are not modified significantly and the required annual FPC assessments are maintained.



Martin McCullagh
Certification Manager
For and on behalf of BRE Global Limited

Date Of Issue: 27/5/2010
Issue Number: 4
Page: 1 of 2

This certificate remains the property of BRE Global Limited and is issued subject to terms and conditions and is maintained and held in force through regular Factory Production Control audits.
To check the authenticity of this certificate, please visit our website or contact us.

BRE Global Limited & LPCB

Bucknalls Lane, Garston, Watford, Hertfordshire, United Kingdom WD25 9XX

Telephone: +44(0)1923 664100 Fax: +44(0)1923 664603 E-mail: enquiries@breglobal.co.uk Web: www.breglobal.co.uk

Appendix to EC Certificate of conformity 0832 - CPD - 0433

The details and conditions of use for the MI-WSD-x-I Intelligent wall mounted sounder with short circuit isolator, placed on the market by Morley IAS Fire Systems By Honeywell, Charles Avenue, Burgess Hill, West Sussex, RH15 9UF are:

To be used in accordance with the suppliers installation instructions and in conjunction with the following bases, ancillaries, sounder tones and sensitivity settings (*where applicable*):

Sounder Tones:

1 - Alternating 554/440 2Hz (100mS/400mS), 2 - Alternating 800/970 1Hz, 3 - Alternating 800/970 2Hz, 4 - Alternating 2400/2900 3Hz, 5 - Alternating 2500/3100 2Hz, 6 - Alternating 988/645 2Hz, 7 - Continuous 660, 8 - Continuous 970, 9 - Continuous 1200, 10 - Continuous 2850, 11 - Continuous 4000, 12 - Intermittent 660 0.05Hz 6.5s on, 13s off, 13 - Intermittent 660 0.277Hz 1.8s on, 1.8s off, 14 - Intermittent 660 3.33Hz 150mS on, 150mS off, 15 - Intermittent 970 0.8Hz 0.25s on, 1s off, 16 - Intermittent 970 1Hz 1s on, 1s off, 17 - Intermittent 2850 1Hz, 18 - Intermittent 970 1Hz 500mS on, 500mS off, 19 - Intermittent 950 0.22Hz (0.5s on, 0.5s off) *3, 1.5s off, 20 - Intermittent 2850 4Hz 150mS on, 100mS off, 21 - Sweep 400-1200 (0.5s on, 0.5s off)*3, 1.5s off, 22 - Sweep 1200 - 500 0.99Hz 1s on, 0.01s off, 23 - Sweep 2400 - 2850 7Hz, 24 - Sweep-Slow Whoop 500-1200Hz 0.5s off, 3.5s on, 25 - Sweep 800 - 970 50Hz, 26 - Sweep 800 - 970 7Hz, 27 - Sweep 800 - 970 1Hz, 28 - Sweep 2400 - 2850 50Hz, 29 - Sweep 500 - 1000 7Hz, 30 - Sweep 500 - 1200 - 500 0.166Hz rise 1s, stable 4s, fall 1s, 31 - Sweep 800 - 1000 2Hz, 32 - Sweep 2400 - 2850 1Hz

Variants:


MI-WSD-R-I - Red body

MI-WSD-W-I - Detector White body

MI-WSD-P-I - Pure White body

Notes:

1) x denotes the body colour identified as a variant

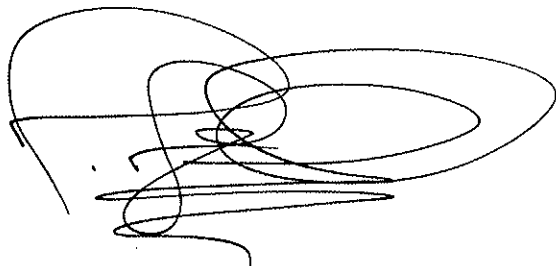

Martin McCullagh
Certification Manager
For and on behalf of BRE Global Limited

Date Of Issue: 27/5/2010
Issue Number: 4
Page: 2 of 2

This certificate remains the property of BRE Global Limited and is issued subject to terms and conditions and is maintained and held in force through regular Factory Production Control audits.
To check the authenticity of this certificate, please visit our website or contact us.